

卧式离心泵

可输送水和介质中含有悬浮颗粒的适度腐蚀性的液体，
可广泛应用于各种民用和工业服务行业。



D-string®

应用

- 1、供水、水循环、增压、灌溉
- 2、奶业加工
- 3、纺织工业
- 4、包装工业中的生产洗涤
- 5、工业上的冲洗设备
- 6、金属洗涤和表面处理
- 7、商业洗碗机

产品特点说明

- 1、结构设计为从水泵后部分开式
- 2、可提供单级叶轮、两级叶轮和开放式叶轮的水泵
- 3、采用独特的激光焊接技术，使水泵具有高强度、高效率和极好的可靠性。



技术参数

- 1、流量：可达75m³/h
- 2、扬程：可达70m
- 3、功率：可达22KW
- 4、介质温度：
DX、2DX(可选择)、DO、DS(C) 110℃
DX、2DX、CM 85℃ (标准的)
MOX 70℃
- 5、允许介质中颗粒的最大直径：20mm
- 6、最大工作压力：12bar
- 7、电机：IP55 TEFC 电机（标准的）
F级绝缘
单相：220-240V/50HZ
三相：380-415V/50HZ
转速：2900rpm（可提供1450rpm）




技术参数：

型号	泵壳	叶轮	轴	轴封
DX/2DX	304不锈钢	304不锈钢	316不锈钢	陶瓷/碳化硅
DO	316L不锈钢	316L不锈钢	316不锈钢	碳化钨/碳化硅
MCX	304不锈钢	玻璃纤维增强	不锈钢	石墨/陶瓷
DM	铸铁	铸铜	不锈钢	石墨/陶瓷
DS/DSC	316L/304不锈钢	316L/304不锈钢	不锈钢	陶瓷/碳化钨








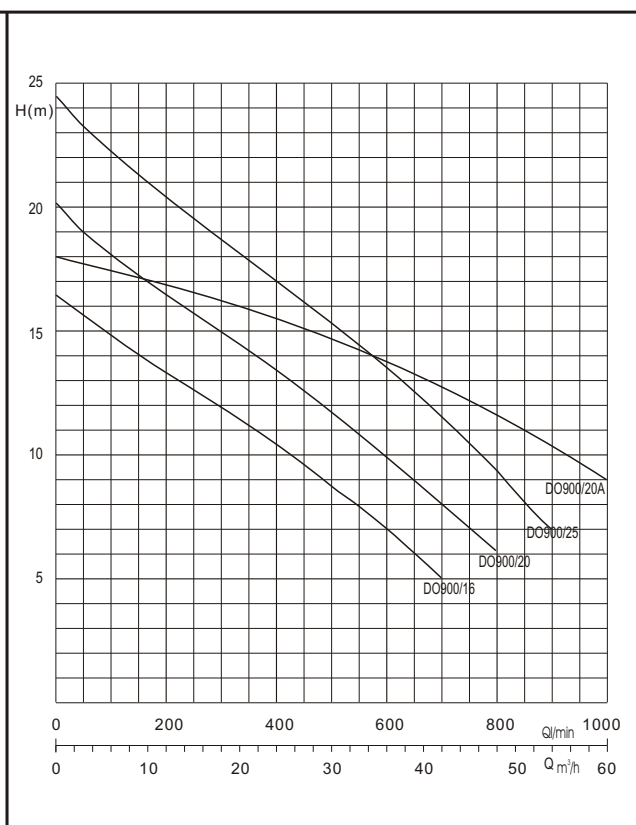
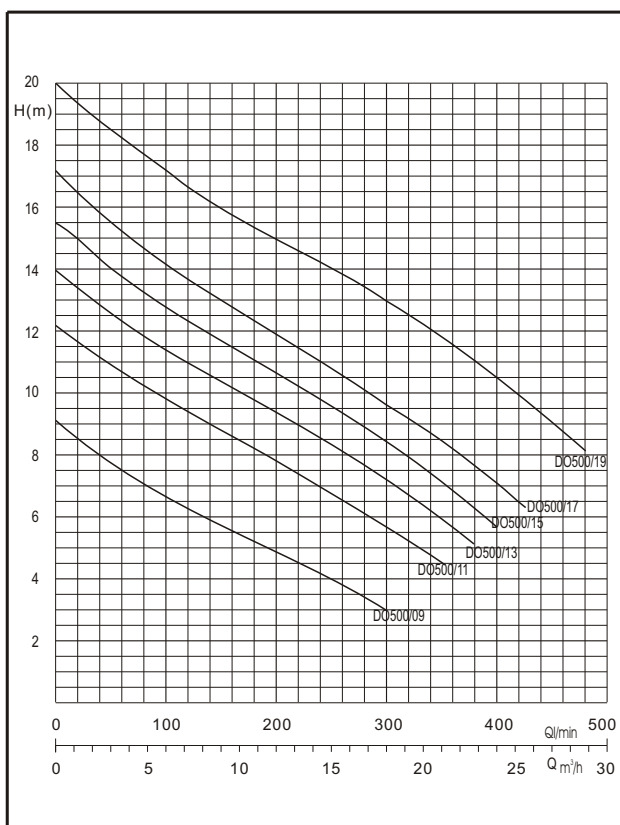


水泵型号	KW	HP	V 380-415V	输入电流		P1 kW (输入功率)	Isp/In (起动电流)
				u F 220-240V	In(A) 220-240V		
DO 500/08	0.37	0.5	1.1		1.9	0.62	4.7
DO 500/11	0.55	0.75	1.6		2.8	0.86	5.3
DO 500/13	0.75	1	1.9		3.3	1.05	5.8
DO 500/15	0.9	0.2	2.1		3.6	1.2	5.8
DO 500/17	1.1	0.5	2.9		5	1.55	6.4
DO 500/19	1.5	2	3.7		6.4	2.05	6.6
DO 900/16	1.5	2	3.6		6.2	2	6.6
DO 900/20	2.2	3	5		8.7	2.9	6.9
DO 900/20A	3	4					
DO 900/25	3	4	3		6.9	4.1	6.8
DOM 500/08	0.37	0.5	450	12.5	2.7	0.62	3
DOM 500/11	0.55	0.75	450	18	4	0.89	3.4
DOM 500/13	0.75	1	450	22	4.9	1.1	3.7
DOM 500/15	0.9	0.2	450	22	5.6	1.25	3.7
DOM 500/17	1.1	0.5	450	30	7.4	1.55	4
DOM 500/19	1.5	2	450	40	9.8	2.15	4.1
DOM 900/16	1.5	2	450	40	9.5	2.1	4.1
DOM 900/20	2.2	3	450	50	13	3	3.3

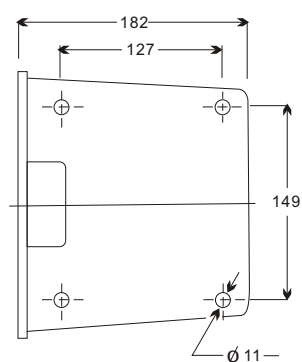
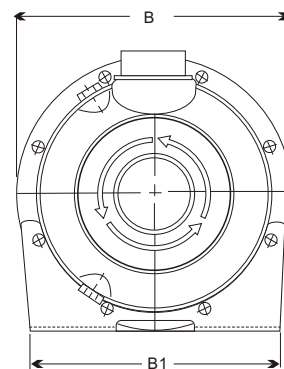
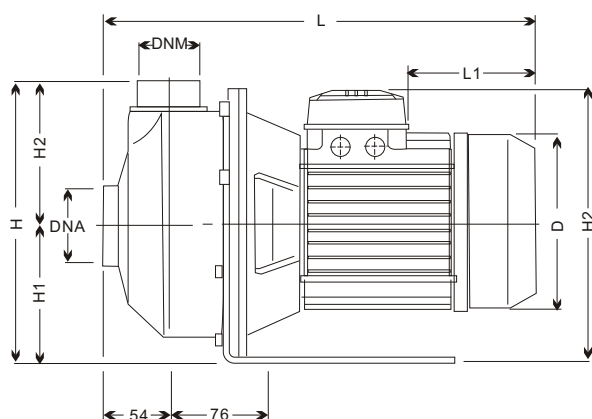



水泵型号	KW	尺寸 (毫米)						DNA (进口)	DNM (出口)	重量 (公斤)
		L	H	H1	H2	B1	B2			
DOM 500/08	0.37	325	222	109	113	215	196	Rp1"½	Rp1"¼	9
DOM 500/11	0.55	339	222	109	113	215	196	Rp1"½	Rp1"¼	10
DOM 500/13	0.75	339	222	109	113	215	196	Rp1"½	Rp1"¼	12
DOM 500/15	0.9	339	222	109	113	215	196	Rp1"½	Rp1"¼	12
DOM 500/17	1.1	385	222	109	113	215	196	Rp1"½	Rp1"¼	15
DOM 500/19	1.5	385	222	109	113	215	196	Rp1"½	Rp1"¼	18
DOM 900/16	1.5	385	222	109	113	215	196	Rp 2"	Rp1"½	18
DOM 900/20	2.2	416	222	109	113	215	196	Rp 2"	Rp1"½	20
DO 500/08	0.37	325	222	109	113	215	196	Rp1"½	Rp1"¼	9
DO 500/11	0.55	339	222	109	113	215	196	Rp1"½	Rp1"¼	10
DO 500/13	0.75	339	222	109	113	215	196	Rp1"½	Rp1"¼	12
DO 500/15	0.9	339	222	109	113	215	196	Rp1"½	Rp1"¼	12
DO 500/17	1.1	385	222	109	113	215	196	Rp1"½	Rp1"¼	13
DO 500/19	1.5	385	222	109	113	215	196	Rp1"½	Rp1"¼	15
DO 900/16	1.5	385	222	109	113	215	196	Rp 2"	Rp1"½	16
DO 900/20	2.2	385	222	109	113	215	196	Rp 2"	Rp1"½	18
DO 900/20A	3	415	253	120	133	193	180	Rp 2"½	Rp2	20
DO 900/25	3	416	222	109	113	215	196	Rp 2"	Rp1"½	20

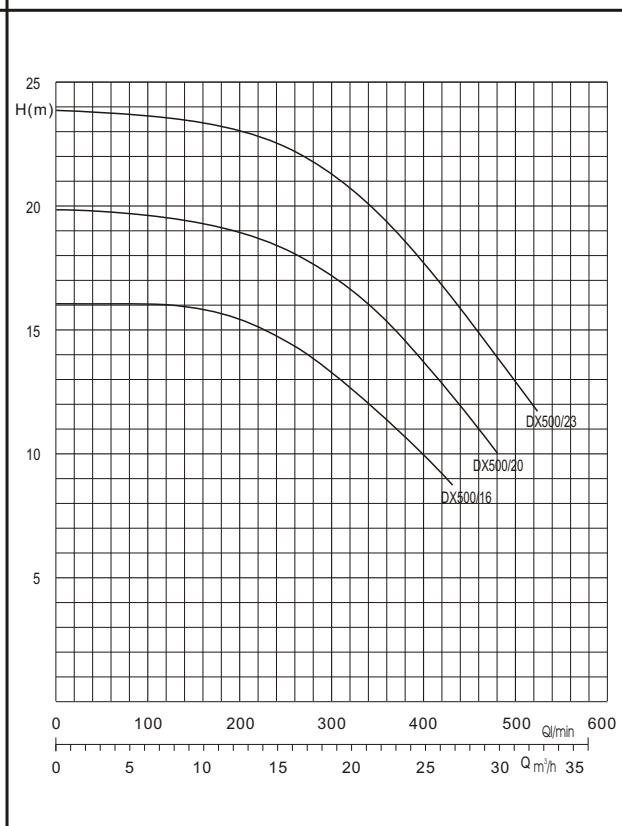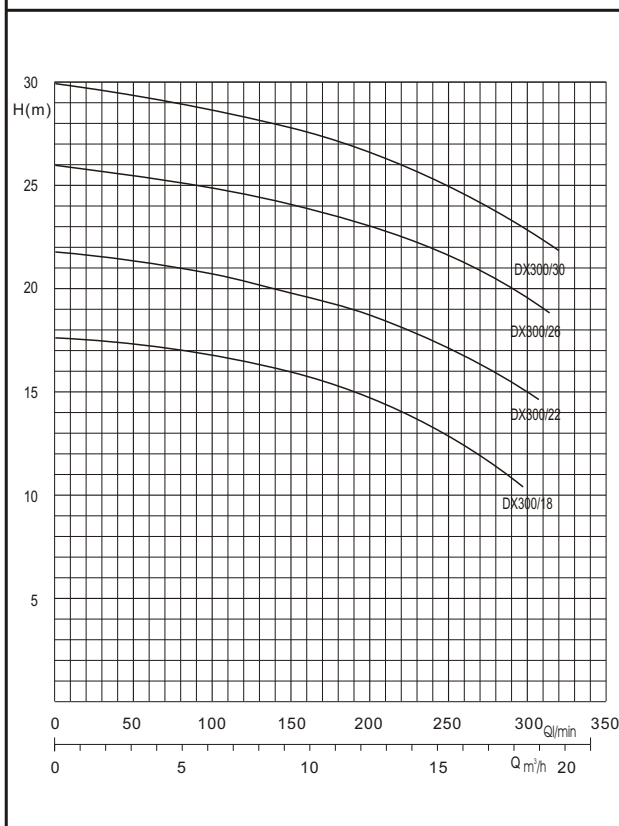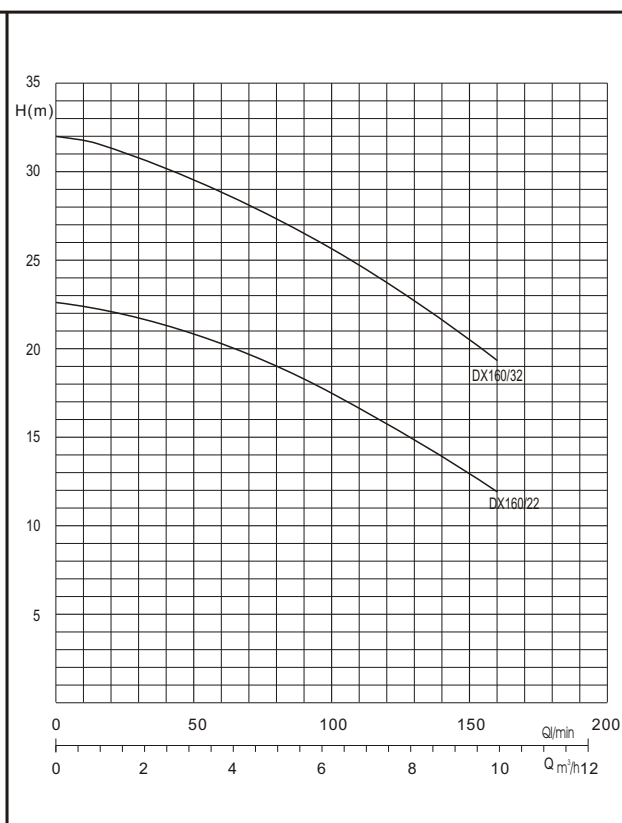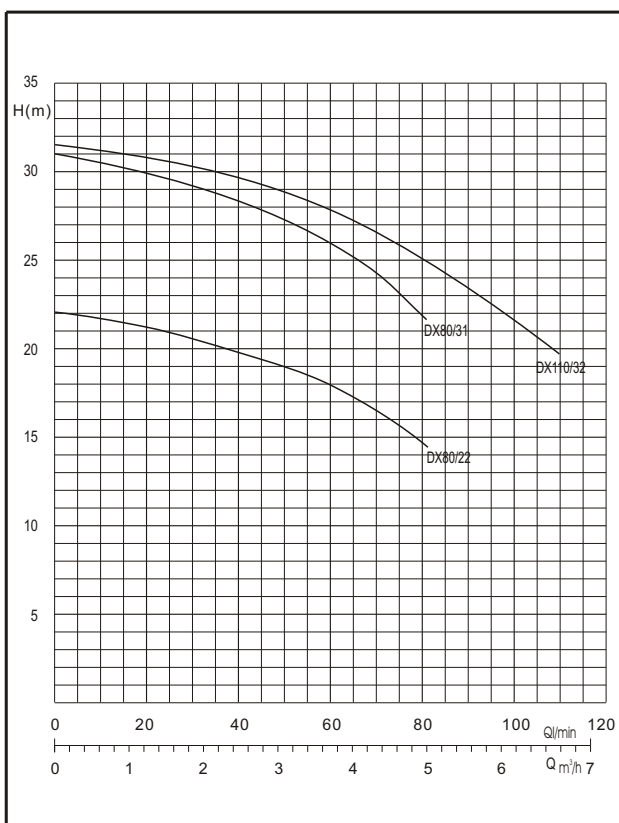

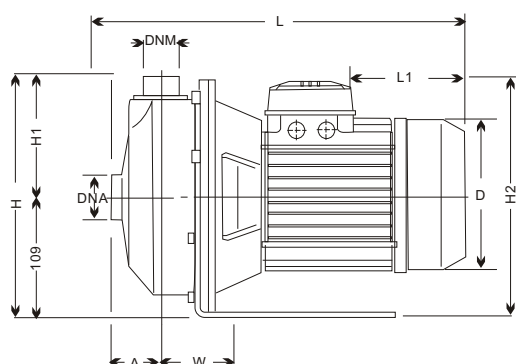

水泵型号	KW	尺寸 (毫米)								DNA (进口)	DNM (出口)	重量 (公斤)
		A	D	H	H1	H2	L	L1	W			
DXM 80/22	0.37	51	120	220	111	220	311	62	65	Rp1" ¹ / ₄	Rp1"	10
DXM 80/31	0.55	51	140	220	111	230	325	76	65	Rp1" ¹ / ₄	Rp1"	12
DXM 110/32	0.75	51	140	220	111	230	325	76	65	Rp1" ¹ / ₄	Rp1"	12
DXM 160/22	0.55	51	140	220	111	230	325	76	65	Rp1" ¹ / ₄	Rp1"	12
DXM 160/32	0.9	51	140	220	111	239	325	31	65	Rp1" ¹ / ₄	Rp1"	15
DXM 300/18	0.75	54	140	222	113	230	339	76	76	Rp1" ¹ / ₂	Rp1" ¹ / ₄	12
DXM 300/22	1.1	54	156	222	113	246	385	69	76	Rp1" ¹ / ₂	Rp1" ¹ / ₄	15
DXM 300/26	1.5	54	156	222	113	246	385	69	76	Rp1" ¹ / ₂	Rp1" ¹ / ₄	22
DXM 300/30	2.2	54	176	222	113	230	416	114	76	Rp1" ¹ / ₂	Rp1" ¹ / ₄	22
DXM 500/16	1.1	54	156	222	113	246	385	69	76	Rp 2"	Rp1" ¹ / ₄	15
DXM 500/20	1.5	54	156	222	113	246	385	69	76	Rp 2"	Rp1" ¹ / ₄	20
DXM 500/23	2.2	54	176	222	113	230	416	114	76	Rp 2"	Rp1" ¹ / ₄	22
DX 80/22	0.37	51	120	220	111	220	343	62	65	Rp1" ¹ / ₄	Rp1"	10.5
DX 80/31	0.55	51	140	220	111	220	343	76	65	Rp1" ¹ / ₄	Rp1"	12.6
DX 110/32	0.75	51	140	220	111	221	366	76	65	Rp1" ¹ / ₄	Rp1"	12.6
DX 160/22	0.55	51	140	220	111	220	343	76	65	Rp1" ¹ / ₄	Rp1"	12.6
DX 160/32	1.1	51	140	222	111	221	366	76	65	Rp1" ¹ / ₄	Rp1"	15.8
DX 300/18	0.75	54	140	222	113	222	380	76	76	Rp1" ¹ / ₂	Rp1" ¹ / ₄	12.6
DX 300/22	1.1	54	156	222	113	222	380	114	76	Rp1" ¹ / ₂	Rp1" ¹ / ₄	15.8
DX 300/26	1.5	54	156	222	113	229	422	114	76	Rp1" ¹ / ₂	Rp1" ¹ / ₄	17.9
DX 300/30	2.2	54	156	222	113	229	422	114	76	Rp1" ¹ / ₂	Rp1" ¹ / ₄	20
DX 500/16	1.1	54	156	222	113	222	380	114	76	Rp 2"	Rp1" ¹ / ₄	15.8
DX 500/20	1.5	54	156	222	113	229	422	114	76	Rp 2"	Rp1" ¹ / ₄	17.9
DX 500/24	2.2	54	156	222	113	229	422	114	76	Rp 2"	Rp1" ¹ / ₄	20

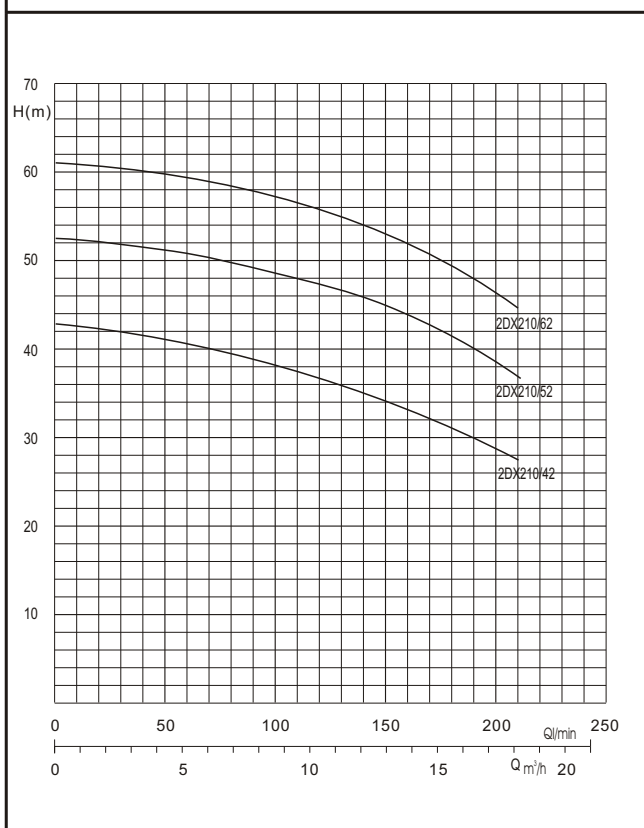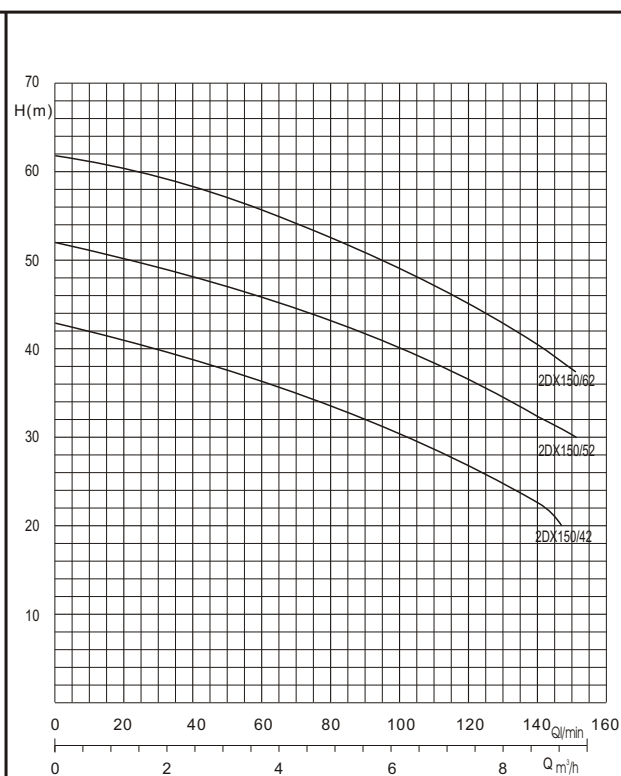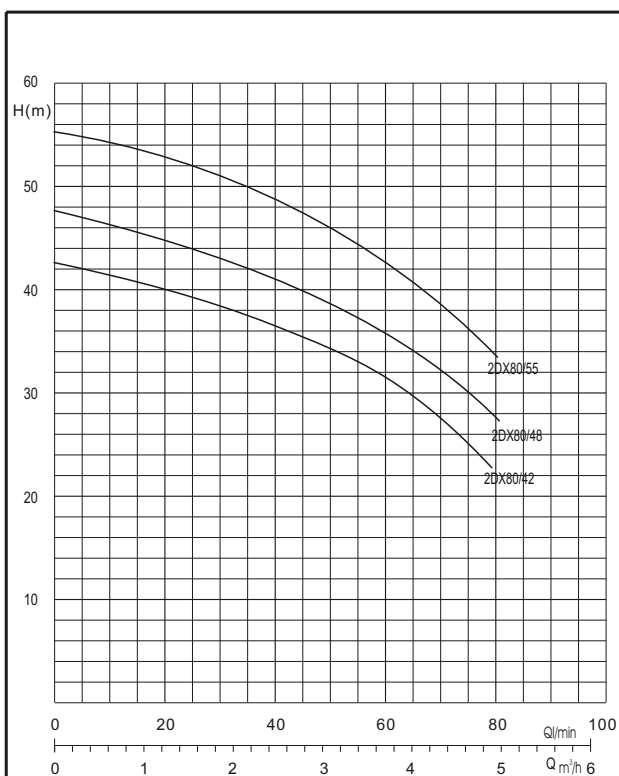

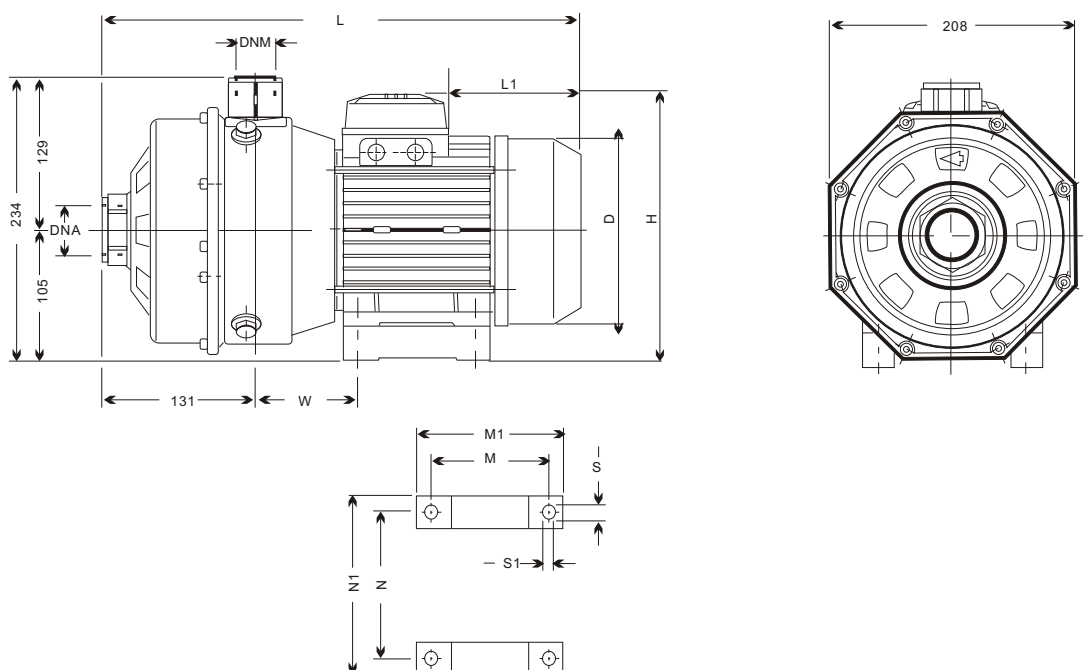




水泵型号	KW	尺寸 (毫米)											DNA (进口)	DNM (出口)	重量 (公斤)
		D	H	L	L1	M	M1	N	N1	S	S1	W			
2DXM 80/42	0.75	140	226	383	76	90	113	112	135	12	7	66	Rp1 ¹ / ₄ "	Rp1"	14
2DXM 80/48	0.9	140	235	383	31	90	113	112	135	12	7	66	Rp1 ¹ / ₄ "	Rp1"	14
2DXM 80/55	1.1	156	242	420	69	100	125	125	153	12	9	76	Rp1 ¹ / ₄ "	Rp1"	17
2DXM 150/42	1.1	156	242	420	69	100	125	125	153	12	9	76	Rp1 ¹ / ₄ "	Rp1"	16
2DXM 150/52	1.5	156	242	420	69	100	125	125	153	12	9	76	Rp1 ¹ / ₄ "	Rp1"	23
2DXM 150/62	1.85	176	226	450	114	125	156	140	170	13	9	98	Rp1 ¹ / ₄ "	Rp1"	23
2DXM 210/42	1.85	176	226	450	114	125	156	140	170	13	9	98	Rp1 ¹ / ₄ "	Rp1"	24
2DX 80/42	0.75	140	234	412	76	90	113	112	135	12	7	66	Rp1 ¹ / ₄ "	Rp1"	14.7
2DX 80/48	0.9	140	234	412	76	90	113	112	135	12	7	66	Rp1 ¹ / ₄ "	Rp1"	14.7
2DX 80/55	1.1	156	234	412	114	100	125	125	153	12	9	76	Rp1 ¹ / ₄ "	Rp1"	17.9
2DX 150/42	1.1	156	234	412	114	100	125	125	153	12	9	76	Rp1 ¹ / ₄ "	Rp1"	16.8
2DX 150/52	1.5	156	234	459	114	100	125	125	153	12	9	76	Rp1 ¹ / ₄ "	Rp1"	18.9
2DX 150/62	1.85	156	234	459	114	100	125	125	153	12	9	76	Rp1 ¹ / ₄ "	Rp1"	22.1
2DX 210/42	1.85	156	234	459	114	100	125	125	153	12	9	76	Rp1 ¹ / ₄ "	Rp1"	22.1
2DX 210/52	2.2	176	234	459	149	125	156	140	170	13	9	98	Rp1 ¹ / ₄ "	Rp1"	23.1
2DX 210/62	3	176	244	503	149	125	156	140	170	13	9	98	Rp1 ¹ / ₄ "	Rp1"	25.2


电气参数 (50HZ, 2800rpm) DX系列

水泵型号	电机功率		输入电流		电容		输入功率 P1 KW	重量 (公斤)
	KW	HP	In(A) 220-240V	In(A) 380-415V	uF	V		
DX 80/22	0.37	0.5	2.6		12.5	450	0.6	3.4
DX 80/31	0.55	0.75	4.2		18	450	0.96	3.4
DX 110/32	0.75	1	4.8		22	450	1.07	3.8
DX 160/22	0.55	0.75	3.8		18	450	0.87	3.7
DX 160/32	0.9	1.2	6		22	450	1.34	3
DX 300/18	0.75	1	5.2		22	450	1.2	3.4
DX 300/22	1.1	1.5	7.4		30	450	1.6	3.7
DX 300/26	1.5	2	9		40	450	2.05	4
DX 300/30	2.2	3	11		50	450	2.4	3.9
DX 500/16	1.1	1.5	7.4		30	450	2.5	3.7
DX 500/20	1.5	2	10.4		40	450	2.5	3.6
DX 500/23	2.2	3	11.5		50	450	2.6	3.7
DX 80/22	0.37	0.5	1.65	0.94			0.58	6.1
DX 80/31	0.55	0.75	2.30	1.33			0.88	6.1
DX 110/32	0.75	1	3.0	1.74			1.04	6.1
DX 160/22	0.55	0.75	2.30	1.33			0.79	6.1
DX 160/32	1.1	1.5	4.25	2.45			1.34	7.0
DX 300/18	0.75	1	2.30	1.33			1.12	6.1
DX 300/22	1.1	1.5	4.25	2.45			1.5	7.0
DX 300/26	1.5	2	5.75	3.30			1.98	7.0
DX 300/30	2.2	2.9	8.15	4.70			2.35	7.0
DX 500/16	1.1	1.5	4.25	2.45			1.53	7.0
DX 500/20	1.5	2	5.75	3.30			2.2	7.0
DX 500/23	2.2	2.9	8.15	4.70			2.63	7.0

电气参数 (50HZ, 2850rpm) 2DX系列


水泵型号	电机功率		输入电流		电容		输入功率 P1 KW	重量 (公斤)
	KW	HP	In(A) 220-240V	In(A) 380-415V	uF	V		
2DX 80/42	0.75	1	5		22	450	1.5	3.6
2DX 80/48	0.9	1.2	5.8		22	450	1.5	3.1
2DX 80/55	1.1	1.5	8.1		30	450	1.8	3.4
2DX 150/42	1.1	1.5	7		30	450	1.55	3.9
2DX 150/52	1.5	2.2	9.5		40	450	2.15	4
2DX 150/62	2.2	3	12.2		50	450	2.7	3.5
2DX 210/42	2.2	3	11.5		50	450	2.6	3.7
2DX 80/42	0.75	1	3.0	1.74			1.09	6.1
2DX 80/48	1.1	1.5	4.3	2.45			1.3	7.0
2DX 80/55	1.1	1.5	4.3	2.45			1.7	7.0
2DX 150/42	1.1	1.5	4.3	2.45			1.56	7.0
2DX 150/52	1.5	2	5.8	3.30			2.1	7.0
2DX 150/62	2.2	3	8.15	4.70			2.65	7.0
2DX 210/42	2.2	3	8.15	4.70			2.64	7.0
2DX 210/52	2.2	3	8.15	4.70			3.5	7.0
2DX 210/62	3	4	10.4	6.00			4.4	7.0

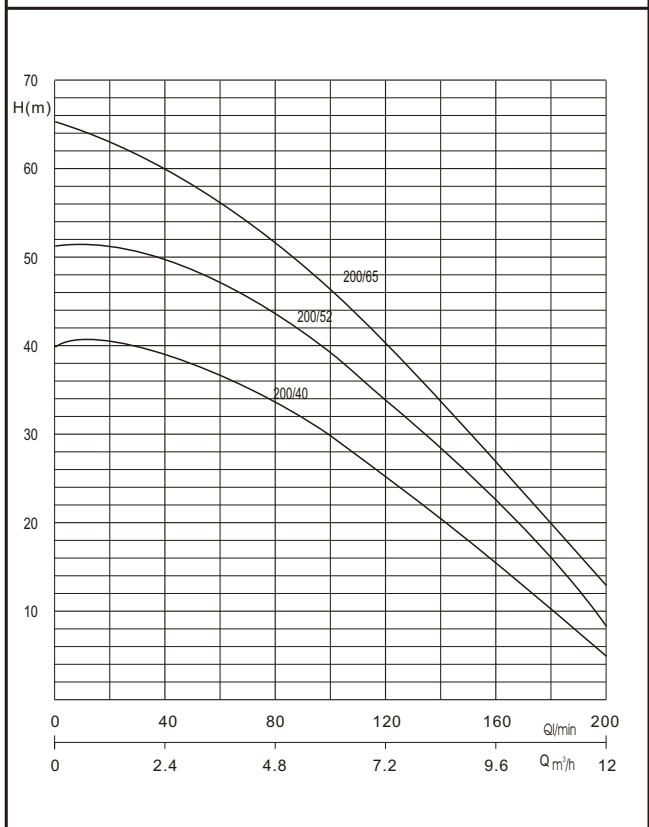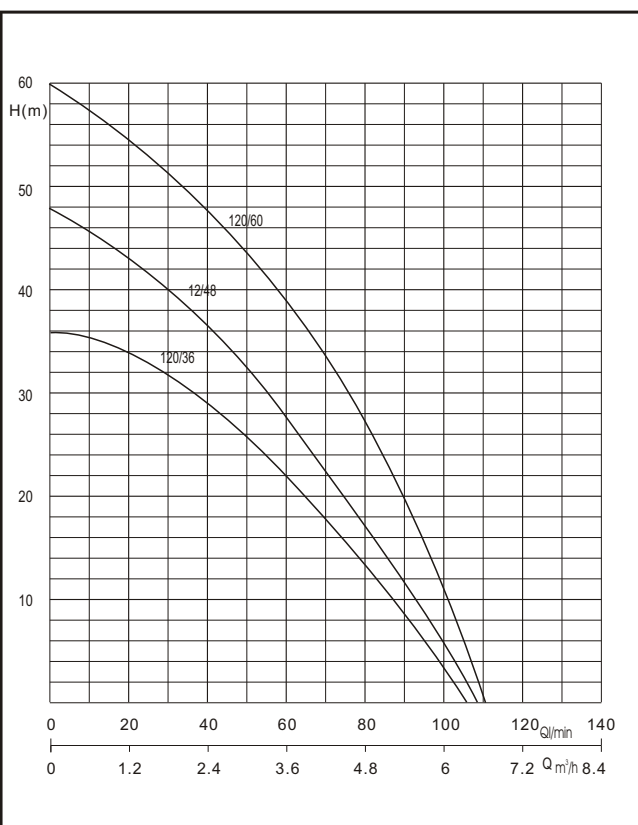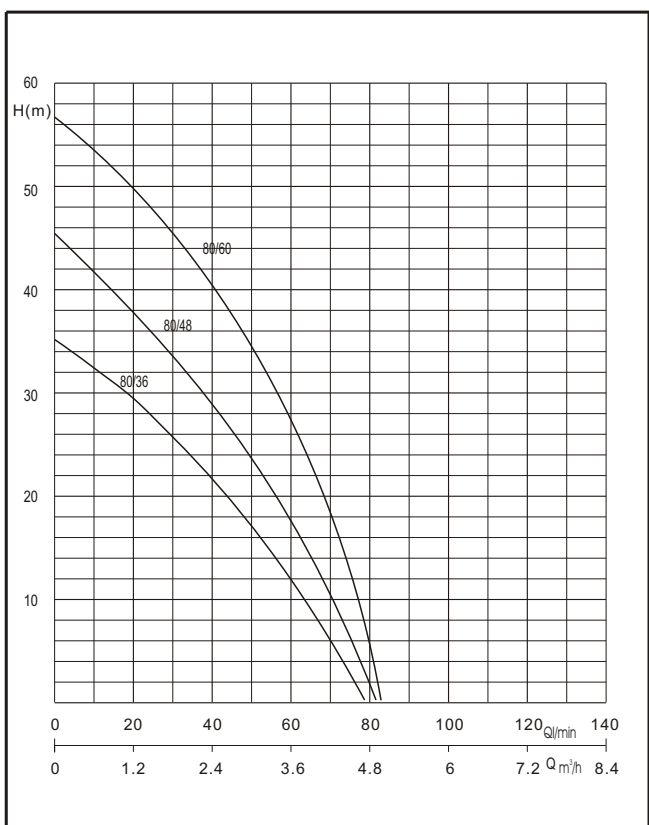

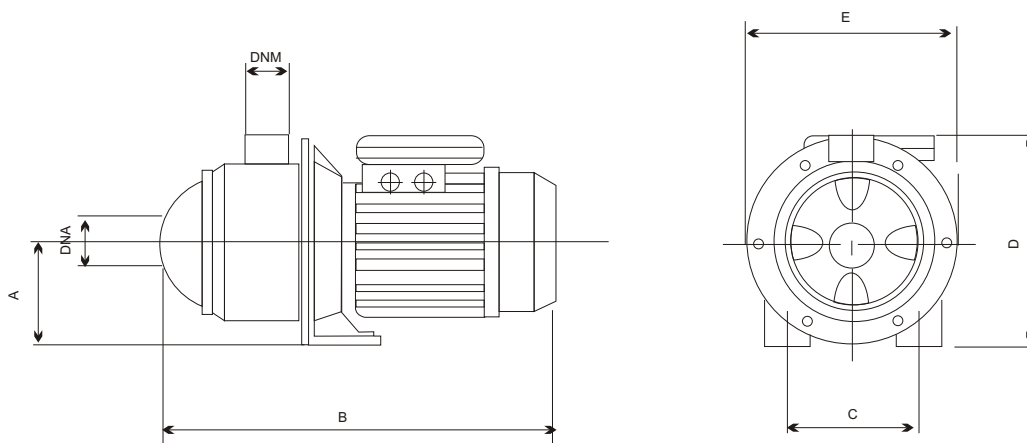


水泵型号	尺寸（毫米）					DNA （进口）	DNM （出口）
	A	B	C	D	E		
MCX 80/36	90	296	99	190	174	G1"	G1
MCX 80/48		318		195			
MCX 80/60		360					
MCX 120/36		316					
MCX 120/48		338					
MCX 120/60		360					
MCX 200/40	105	400	141	235	205	G1'1/4	G1'1/4
MCX 200/52		430					
MCX 200/65		460					




水泵型号	输出功率		输入功率		电压 Voltage	电流 Amp.	电容 uF
	HP	KW	HP	KW			
MCX 80/36M MCX 80/36T	0.6	0.45	0.8	0.6	1-230V 3~230 ÷ 400V	2.9 2-1.2	12.5
MCX 80/48M MCX 80/48T					1-230V 3~230 ÷ 400V	4 2.6-1.5	
MCX 80/60M MCX 80/60T	1	0.75	1.3	1	1-230V 3~230 ÷ 400V	4.8 2.9-1.7	16
MCX 120/36M MCX 120/36T					1-230V 3~230 ÷ 400V	3.5 2.9-1.7	
MCX 120/48M MCX 120/48T	1	0.75	1.5	1.1	1-230V 3~230 ÷ 400V	4.6 3.6-2.1	16
MCX 120/60M MCX 120/60T					1-230V 3~230 ÷ 400V	5.8 3.5-2	
MCX 200/40M MCX 200/40T	1.5	1.1	2	1.5	1-230V 3~230 ÷ 400V	7 3.6-2.1	20
MCX 200/52M MCX 200/52T					1-230V 3~230 ÷ 400V	8.5 5-2.9	
MCX 200/65T	1.9	1.4	2.7	2	3~230 ÷ 400V	6-3.5	

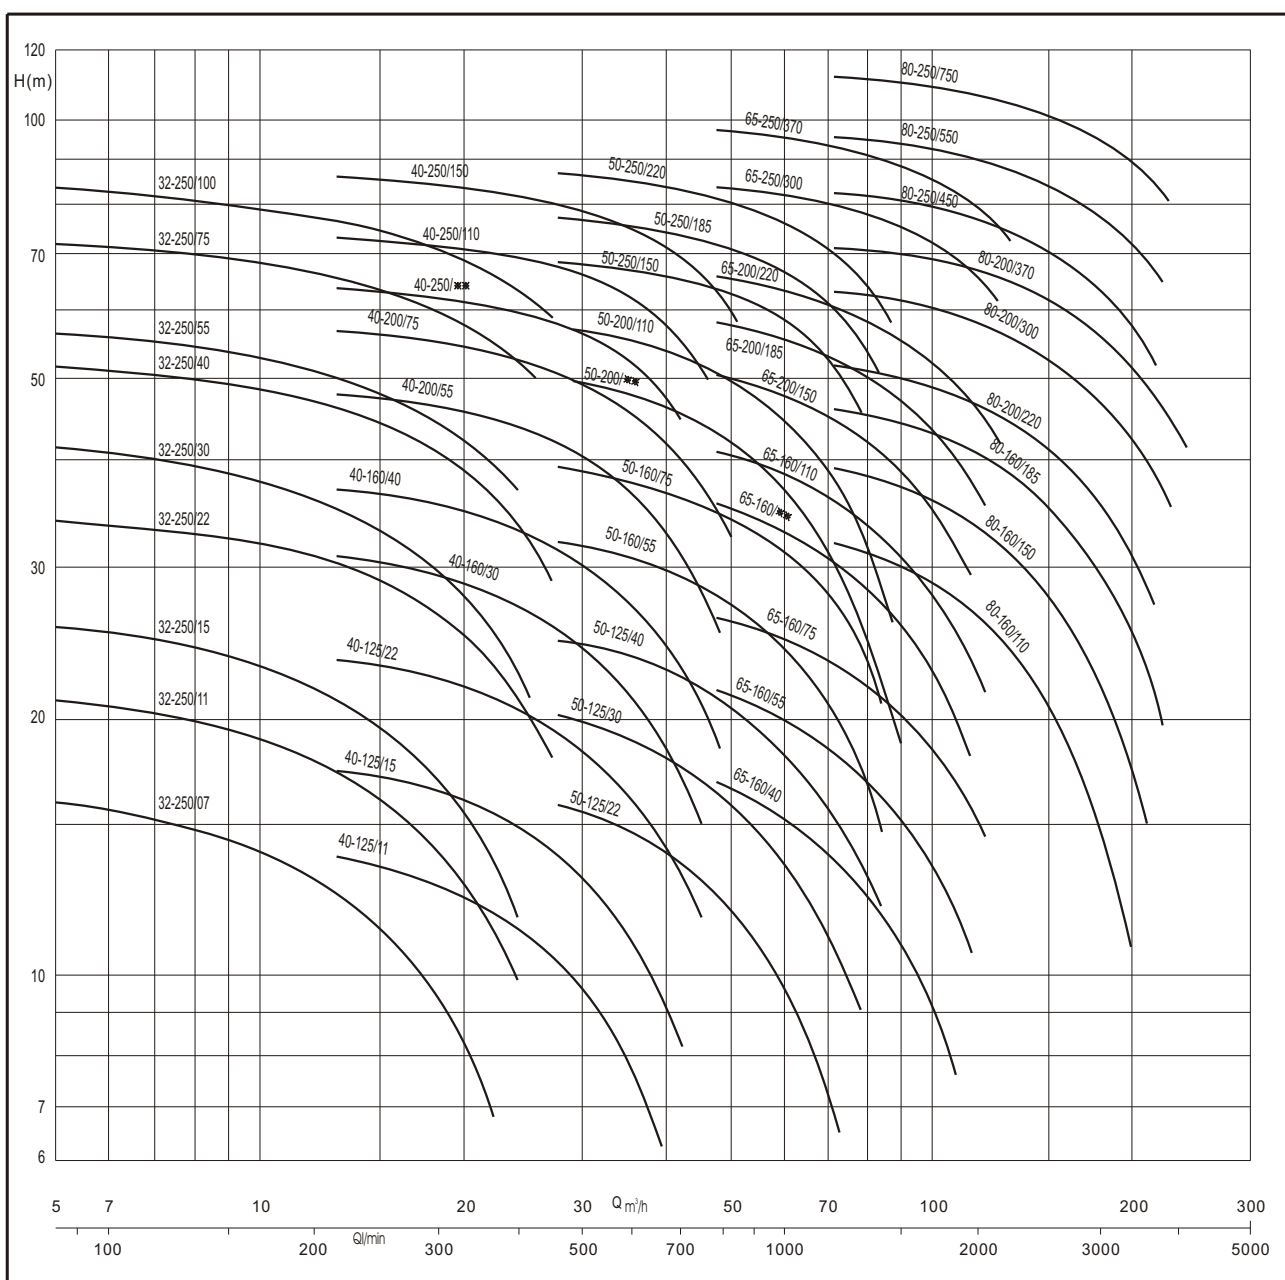

至11KW

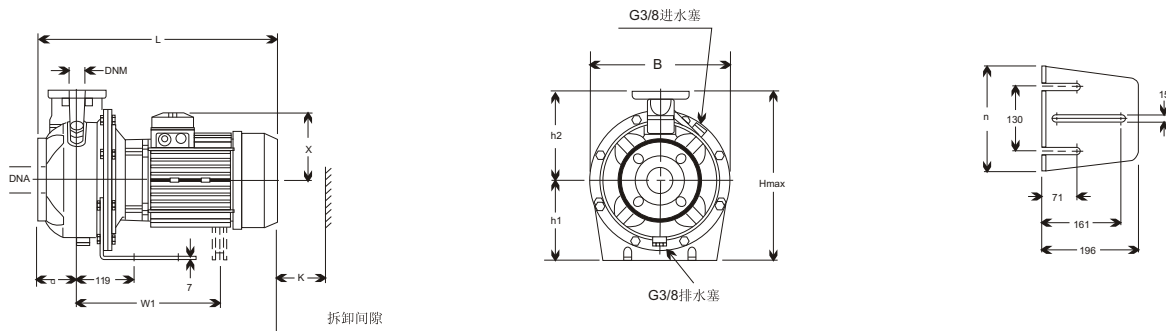


15KW以上

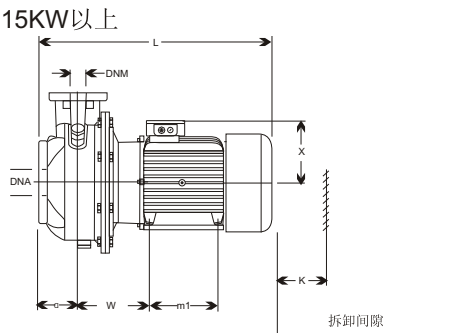

水泵型号	水泵							尺寸（毫米）											B	H _{max}	L	K	重量 (kg)
	DNM	DNA	a	h2	w	w1	x	b	c	c1	h1	m	m1	n	n1	s	s1						
DS 32-125/07	32	50	80	140			129				112			190				218	252	443	98	20	
DS 32-125/11	32	50	80	140			129				112			190				218	252	443	98	22	
DS 32-160/15	32	50	80	160			129				132			210				253	292	443	98	23	
DS 32-160/22	32	50	80	160			121				132			210				253	292	443	98	25	
DS 32-200/30	32	50	80	180			133				160			230				285	340	461	98	29	
DS 32-200/40	32	50	80	180			150				160			230				285	340	487	98	36	
DS 32-250/55	32	50	100	225			150				180			265				345	405	553	98	48	
DS 32-250/75	32	50	100	225			191				180			265				345	405	553	98	60	
DS 32-250/110	32	50	100	225		278	191				180			265				345	405	604	98	80	
DS 40-125/11	40	65	80	140			232				112			190				219	252	443	100	23	
DS 40-125/15	40	65	80	140			129				112			190				219	252	443	100	25	
DS 40-125/22	40	65	80	140			121				112			190				219	252	443	100	26	
DS 40-160/30	40	65	80	160			133				132			210				254	292	461	100	29	
DS 40-160/40	40	65	80	160			150				132			210				254	292	487	100	35	
DS 40-200/55	40	65	100	180			150				160			230				285	340	553	100	46	
DS 40-200/75	40	65	100	180			191				160			230				285	340	553	100	51	
DS 40-250/92	40	65	100	225		278	191				180			265				345	405	604	107	62	
DS 40-250/110	40	65	100	225		278	232				180			265				345	405	604	107	65	
DS 40-250/150	40	65	100	225	208		232	72	22	20	180	260	210	318	254	13	23	345	412	688	107	91	
DS 50-125/22	50	65	100	160			232				132			210				254	292	463	104	29	
DS 50-125/30	50	65	100	160			133				132			210				254	292	481	104	32	
DS 50-125/40	50	65	100	160			150				132			210				254	292	507	104	35	
DS 50-160/55	50	65	100	180			150				160			210				255	340	553	104	47	
DS 50-160/75	50	65	100	180			191				160			210				255	340	553	104	52	
DS 50-200/92	50	65	100	200		278	191				160			245				310	360	604	104	63	
DS 50-200/110	50	65	100	200		278	232				160			245				310	360	604	104	67	
DS 50-250/150	50	65	100	225	208		232	72	22	20	180	260	210	318	254	13	23	345	412	688	107	103	
DS 50-250/185	50	65	100	225	208		232	72	22	20	180	304	254	318	254	13	23	345	412	732	107	119	
DS 50-250/220	50	65	100	225	208		191	72	22	20	180	304	254	318	254	13	23	345	412	732	107	136	
DS 65-160/40	65	80	100	200			232				160			245				310	360	507	115	60	
DS 65-160/55	65	80	100	200			232				160			245				310	360	553	115	69	
DS 65-160/75	65	80	100	200			232				160			245				310	360	553	115	75	
DS 65-160/92	65	80	100	200		278					160			245				310	360	604	130	92	
DS 65-160/110	65	80	100	200		278					160			245				310	360	604	130	101	
DS 65-200/150	65	80	100	225	208			72	22	20	180	260	210	318	254	13	23	310	412	688	130	116	
DS 65-200/185	65	80	100	225	208			72	22	20	180	304	254	318	254	13	23	310	412	732	130	126	
DS 65-200/220	65	80	100	225	208			72	22	20	180	304	254	318	254	13	23	310	412	732	130	139	
DS 80-160/110	80	100	125	225		278					180			265				345	405	629	160	102	
DS 80-160/150	80	100	125	225	208			72	22	20	180	260	210	318	254	13	23	345	412	713	160	120	
DS 80-160/185	80	100	125	225	208			72	22	20	180	304	254	318	254	13	23	345	412	757	160	139	
DS 80-200/220	80	100	125	250	208			72	22	20	180	304	254	318	254	13	23	345	430	757	160	150	



Technical drawing of a motor assembly showing dimensions and labels. The drawing includes the following dimensions and labels:




- Dimensions:**
 - $D2$: Overall diameter of the motor housing.
 - $K2$: Diameter of the mounting flange.
 - $P2$: Pitch diameter of the mounting flange.
 - $P2 \pm 0.015$: Tolerance on the pitch diameter.
 - S : Thickness of the mounting flange.
 - $H3$: Total height of the motor assembly.
 - $D1$: Diameter of the motor shaft.
 - $K1$: Diameter of the motor shaft.
 - CNA : Diameter of the motor shaft.
 - 16 : Distance from the motor shaft to the mounting flange.
 - R : Radius of the motor shaft.
 - N : Distance from the motor shaft to the mounting flange.
 - 70 : Distance from the motor shaft to the mounting flange.
 - C : Distance from the motor shaft to the mounting flange.
 - B : Total length of the motor assembly.
- Labels:**
 - V**: Label for the motor shaft.



水泵型号	Dimensions(mm)																					重量 (公斤)
	A	B	C	H	H1	H2	H3	M	N1	N2	R	V	S	øD1	øK1	øP1	øD2	øK2	øP2	øDNA	øDNM	
DSC 32-125/1.1	213	408	231	252	112	140	122	114	140	190	80	G3/8	14	165	125	96	140	100	76	50	32	23.5
DSC 32-160/1.5	254	408	231	292	132	160	122	118	190	240	80	G3/8	14	165	125	96	140	100	76	50	32	24.1
DSC 32-160/2.2	254	408	231	292	132	160	122	118	190	240	80	G3/8	14	165	125	96	140	100	76	50	32	26.0
DSC 32-200/3.0	294	433	256	340	160	180	122	119	190	240	80	G3/8	14	165	125	96	140	100	76	50	32	32.0
DSC 32-200/4.0	294	458	256	340	160	180	134	119	190	240	80	G1/2	14	165	125	96	140	100	76	50	32	34.0
DSC 32-200/5.5	294	477	276	340	160	180	153	119	190	240	80	G1/2	14	165	125	96	140	100	76	50	32	46.9
DSC 40-125/1.5	213	408	231	252	112	140	122	114	160	210	80	G3/8	14	185	145	116	150	110	81	65	40	28.5
DSC 40-125/2.2	213	408	231	252	112	140	122	114	160	210	80	G3/8	14	185	145	116	150	110	81	65	40	31.0
DSC 40-160/3.0	254	433	255	292	132	160	122	118	190	240	80	G3/8	14	185	145	116	150	110	81	65	40	36.0
DSC 40-160/4.0	254	458	255	292	132	160	134	118	190	240	80	G1/2	14	185	145	116	150	110	81	65	40	38.0
DSC 40-200/5.5	294	497	278	340	160	180	153	115	212	265	100	G1/2	14	185	145	116	150	110	81	65	40	51.0
DSC 40-200/7.5	294	520	224	340	160	180	153	115	212	265	100	G1/2	14	185	145	116	150	110	81	65	40	53.0
DSC 40-200/11	294	577	224	340	160	180	181	115	212	265	100	G1/2	14	185	145	116	150	110	81	65	40	66.9
DSC 50-125/2.2	254	428	231	292	132	160	122	114	190	240	100	G3/8	16	185	145	116	165	125	96	65	50	32.0
DSC 50-125/3.0	254	453	255	292	132	160	122	114	190	240	100	G3/8	16	185	145	116	165	125	96	65	50	35.5
DSC 50-125/4.0	254	478	255	292	132	160	134	114	190	240	100	G1/2	16	185	145	116	165	125	96	65	50	40.5
DSC 50-160/5.5	296	497	278	340	160	180	153	115	212	265	100	G1/2	16	185	145	116	165	125	96	65	50	55.0
DSC 50-160/7.5	296	520	224	340	160	180	153	115	212	265	100	G1/2	16	185	145	116	165	125	96	65	50	61.0
DSC 50-200/9.2	296	582	239	360	160	200	181	115	212	265	100	G1/2	16	185	145	116	165	125	96	65	50	67.5
DSC 50-200/11	296	582	239	360	160	200	181	115	212	265	100	G1/2	16	185	145	116	165	125	96	65	50	70.0

Technical drawing of the PG29 pump assembly showing dimensions in mm. The drawing includes a side view of the pump and motor. Key dimensions include: total width 735 mm, motor width 485 mm, pump body width 210 mm, and various mounting and connection dimensions. The motor is labeled PG29. The drawing also shows the pump's internal components and the motor's cooling fins.



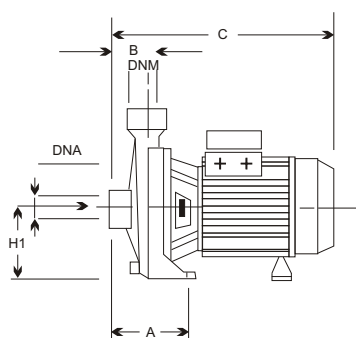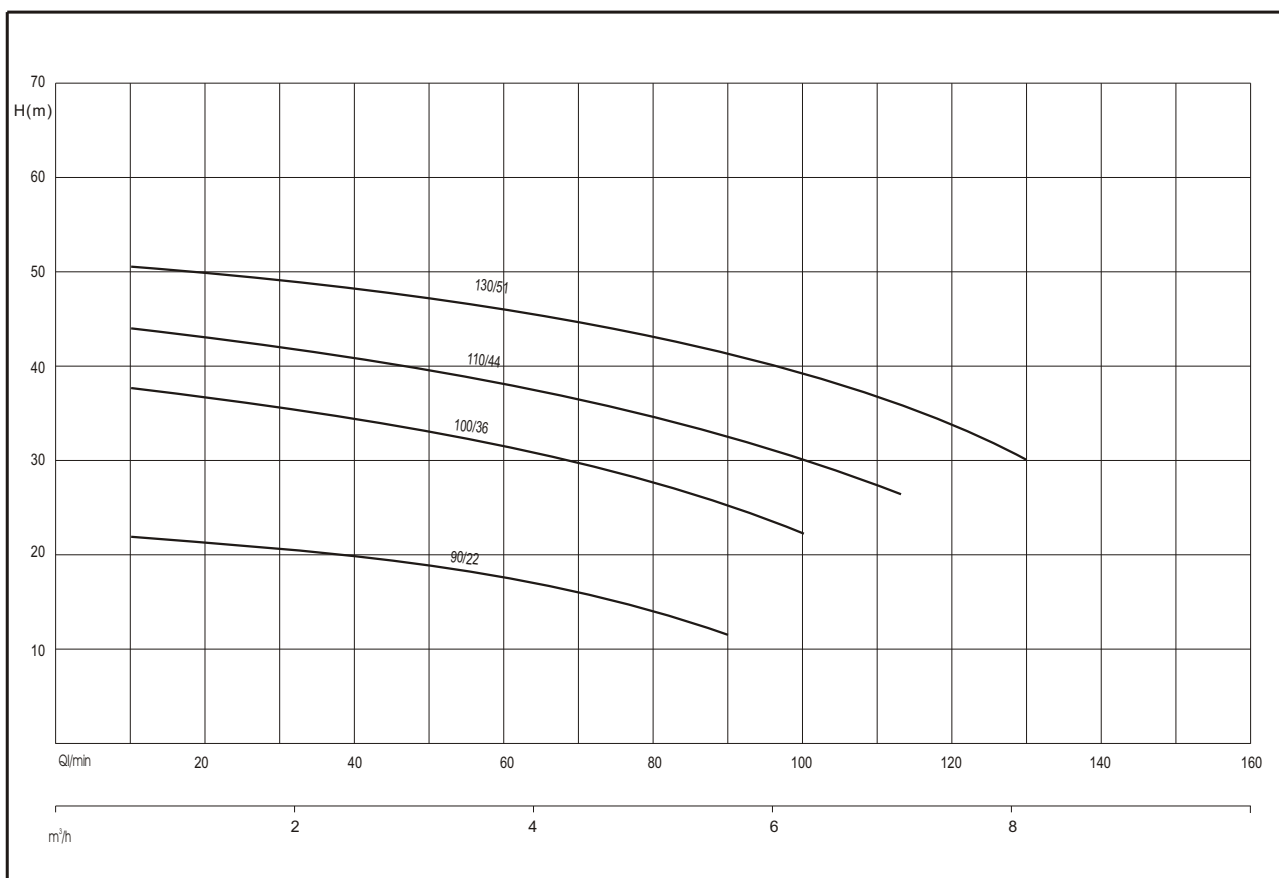

水泵型号	A	B	C	D	尺寸 (毫米)		H1	H2	kw	DNA (进口)	DNM (出口)	重量 (公斤)
CM 90/22	75	43	267	150	110	160	82	202	0.35	1"	1"	6,5
CM 100/36	82	44	310	180	140	185	107	242	0.75	1"	1"	11
CM 110/44	88	45	350	194	155	200	100	252	1.1	1" 1/4	1"	20,5
CM 130/51	88	45	350	220	180	225	115	286	1.5	1" 1/4	1"	23

